
Autograph Patio Doors





The EOS Patio Door is an Energy Optimized System where innovation meets performance. Designed for new construction as well as replacement. Each door is built to order with the shortest lead-time in the industry.



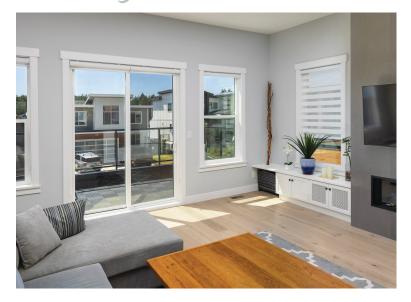




White

Clay

Black/White





- 4-7/8" frame depth.
- Available in 2, 3 or 4 panel systems in 6/8, 6/10 and 8/0 tall by up to 13/6 wide.
- Welded sash & frame.
- IG is 7/8" OA & a 1-1/8" IG for triple glazed.
- Double strength glass & Argon are standard.
- Aluminum threshold cap, sash track
 & screen track for strength & durability.
- Double mortise lock-set.
- 10 gauge steel reinforcement to provide strength & reduce thermal transfer.
- Heavy-duty extruded aluminum screen is standard.
- Finseal Weatherstrip protects against air & water infiltration.
- · Limited lifetime warranty.

Performance Ranges

Structural NAFS: Up to LC-PG55

Thermal U Factor: Down to .26

Acoustical STC: Up to 34db

